

Bateria Kodak Max LR06 blister 4 szt.

Typ: bateria jednorazowego użytku,

bez możliwości ponownego ładowania

Rodzaj: Alkaliczna

Rozmiar: AA - "paluszek"

Napięcie: 1,5 V


Ilość: 4 szt./blister


Dedykowana do urządzeń wymagających stabilnego zasilania o dużym poborze prądu.



Kodak KAA Max Alkaline Battery

Effective: January 17, 2012



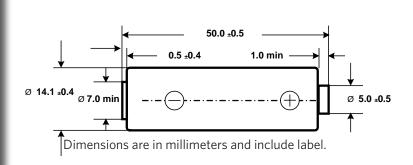

System: Alkaline

Designation: ANSI 15A, IEC LR6

Nominal Voltage: 1.5 Volts

Nominal Capacity: 2800 mAh at 75 Ohms to 0.8 Volts

Internal Impedance: 0.13 Ohms (typical)

Temperature Ranges: -20°C to +54°C (Operating)

+10°C to +25°C (Storage, Recommended)

Chemistry: Zn/MnO₂

Reaction: $2MnO_2 + Zn + H_2O \rightarrow 2MnOOH + ZnO$

Average Weight: 23.0 grams

Volume: 8.0 cm³

Terminals: Flat contacts, Protruding Negative

Jacket: Plastic Label

Note

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.999% Lead Free
- 3) No added Cadmium / 99.999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) Batteries are NOT subject to European RoHS regulations.
- 7) Primary Batteries (non-Rechargeable) are not subject to China RoHS regulations.
- 8) MSDS sheets are available on the Kodak website.

The Data in this publication represents product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. Company reserves the right to change and improve product characteristics at any time.

For more information, contact Eastman Kodak Company, 343 State Street, Rochester NY 14650-0811 Phone 1-800-242-2424. www.kodak.com/go/batteries

© Eastman Kodak Company, 2011

Kodak is a trademark.

