

Bateria Kodak LR06 folia 4 szt.

Typ: bateria jednorazowego użytku,

bez możliwości ponownego ładowania

Rodzaj: chlorowo-cynkowa

Rozmiar: AA - "paluszek"

Napięcie: 1,5 V

Ilość: 4 szt./folia

Podstawowa bateria do użytku w urządzeniach o niskim poborze prądu np. piloty, latarki LED.




Kodak KAAHZ Carbon Zinc Battery

Effective: March 12, 2012





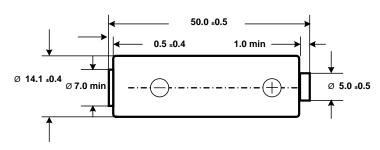

Dimensions are in millimeters and include label.

System: Zinc Carbon (Zn-MnO₂₎

Designation: IEC R6 / ANSI 15

Nominal Voltage: 1.5 Volts

Nominal Capacity: 1150 mAh

Internal Impedance: 2.0 Ohms (max)

Temperature Ranges: 0°C to +45°C (Operating)

+10°C to +25°C (Storage, Recommended)

Chemistry: Zn/MnO₂

Reaction: $2MnO_2 + Zn + H_2O \rightarrow 2MnOOH + ZnO$

Average Weight: 17.5 grams

Volume: 8.0 cm³

Terminals: Flat contacts

Jacket: Metal or PVC Plastic Label

Note

- 1) No added Mercury / 99.999% Mercury Free
- 2) No added PFOS (Perfluorooctane sulfonates)
- 3) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 4) Batteries are NOT subject to European RoHS regulations.
- 5) Primary Batteries (non-Rechargeable) are not subject to China RoHS regulations.
- 6) MSDS sheets are available on the Kodak website.

The Data in this publication represents product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. Company reserves the right to change and improve product characteristics at any time.

For more information, contact Eastman Kodak Company, 343 State Street, Rochester NY 14650-0811 Phone 1-800-242-2424. www.kodak.com/go/batteries

© Eastman Kodak Company, 2012

Kodak is a trademark.

